

## KTM SXF FUEL TANK 15 LT - 3,9 GAL SERBATOIO 15 LT KTM SXF

COD. 500006014 REV.3

ACERBIS PARTS	O.E.M ITEMS TO USE:					
 <p><b>A - (1 PCS)</b></p>	 <p><b>B - (4 PCS)</b></p>	 <p><b>C - (4 PCS)</b></p>	 <p><b>D - (1 PCS)</b></p>	 <p><b>E - (1 PCS)</b></p>	 <p><b>F - (1 PCS)</b></p>	 <p><b>G - (1 PCS)</b></p>

**WARNING**

Durante il rimontaggio suggeriamo vivamente di utilizzare un grasso anti-grippante sulle viti che entrano negli inserti in metallo.

Highly suggest to use anti-seize/grease lubricant on all bolt threads going into the tank's metal inserts when reinstalling.




**WARNING**

ATTENZIONE: All screws self-forming max torque 2.5 Nm.

ATTENTION: Tutte le viti autofornanti coppia di chiusura max 2,5 Nm.




**1**

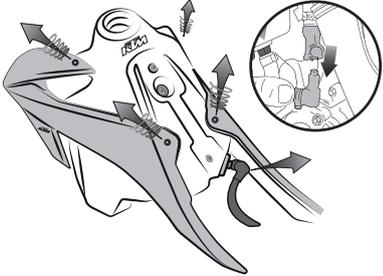

**Remove the radiator scoops. Disconnect the fuel pump cover cable and the fuel connector as indicated in the diagram. Inserire la vite nel foro della parte superiore del serbatoio.**

Togliere i fianchetti. Sconnettere il cavo di alimentazione della pompa. Scollegare connettore benzina.


**2**

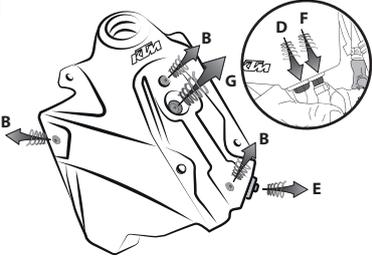

**Remove seat screw (B) and the screws on the side. Remove the tank screw (G), then empty any remaining fuel from the tank. Remove the (D/E/F) fasteners and remove the fuel pump.**

Togliere le viti (B) della sella, e degli attacchi laterali. Togliere la vite del serbatoio (G). Svuotare completamente la benzina dal serbatoio e rimuovere le utenze (D/E/F).

**3**

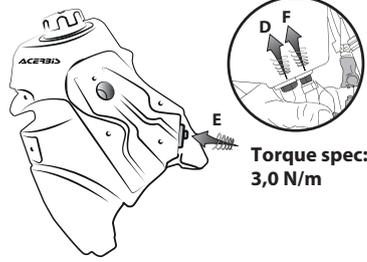

**On the fuel tank Acerbis (A), reconnect the fuel pump (E) with the original screws/hardware.**

Sul serbatoio Acerbis, rimontare la pompa (E) e le utenze (D/F).

**Torque spec: 3,0 N/m**

**WARNING!**

It is **EXTREMELY IMPORTANT** that the fuel tank is properly installed. To ensure proper installation, it is **STRONGLY RECOMMENDED** that the tank is installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injuries or death.

If self-installed **NOTE THE FOLLOWING**: particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous. Do not start or operate the vehicle if there are any fuel leaks! Read all instructions first before beginning installation.

Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation. Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.


**EUROPE**  
ACERBIS ITALIA S.P.A.  
VIA SERIO, 37  
24021 ALBINO (BG)  
ITALY

**U.S.A.**  
ACERBIS U.S.A. INC.  
MAIL P.O. BOX 2030  
SUN VALLEY, ID 83353  
SHIP 110 LINDAY CIRCLE  
KETCHUM, ID 83340  
U.S.A.

**UNITED KINGDOM**  
ACERBIS U.K LTD  
UNIT 4 DUNFERMLINE COURT,  
KINGSTON, MILTON KEYNES  
MK10 0BY  
GREAT BRITAIN

## KTM SXF FUEL TANK 15 LT - 3,9 GAL SERBATOIO 15 LT KTM SXF


COD. 500006014 REV.3

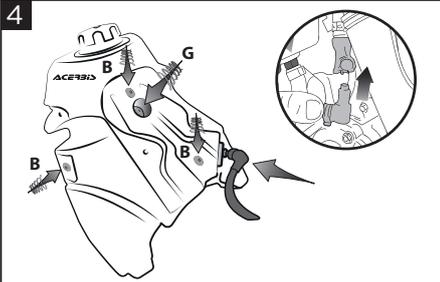

**4**


Place the Acerbis fuel tank (A) on the bike. Insert the tank and seat screws (G/B) as indicated in the diagram. Reconnect the fuel pump power cable and the fuel connector.

Posizionare il serbatoio Acerbis sulla moto. Riavvitare la vite serbatoio (G). Rimettere le viti (B) della sella e degli attacchi laterali. Connettere il cavo di alimentazione della pompa e il connettore benzina.

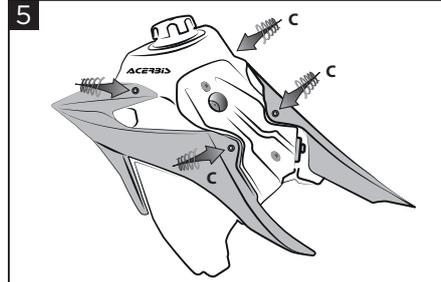

**5**

Assemble the radiator scoops with the screws (C).  
Montare i fianchetti con le viti (C).

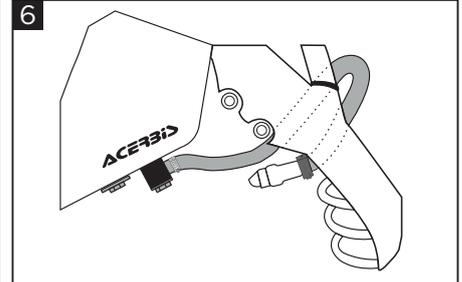

**6**

**ATTENTION: fuel line assembly detail.**  
ATTENZIONE: dettaglio montaggio tubo/pompa.

**Attach the KTM fuel line (F) to the Acerbis tank (A) as indicated in the diagram. Make sure the fuel line isn't folded over, obstructing the fuel flow.**  
Fissare il tubo pompa come indicato. Fare attenzione che il tubo piegandosi non crei strozzature.

### DISCLAIMER

Due to uncontrolled variables in the manufacturing process of rotational molded fuel tanks, the fuel tank may vary in size and shape by up to 7% of the manufacturer's original listed capacity.

### LIBERATORIA

A causa di variabili inponderabili nel processo di stampaggio rotazionale dei serbatoi, questi possono differire in forma e dimensioni fino al 7% rispetto alla capacità dichiarata.

### FOR COMPETITION USE ONLY - SOLO PER USO MOTOCICLISTICO

### WARNING!

It is EXTREMELY IMPORTANT that the fuel tank is properly installed. To ensure proper installation, it is STRONGLY RECOMMENDED that the tank is installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injuries or death.

If self-installed NOTE THE FOLLOWING: particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous.

Do not start or operate the vehicle if there are any fuel leaks! Read all instructions first before beginning installation.

Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation.

Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.

#### EUROPE

ACERBIS ITALIA S.P.A.  
VIA SERIO, 37  
24021 ALBINO (BG)  
ITALY

#### U.S.A.

ACERBIS U.S.A. INC.  
MAIL P.O. BOX 2030  
SUN VALLEY, ID 83353  
SHIP 110 LINDAY CIRCLE  
KETCHUM, ID 83340  
U.S.A.

#### UNITED KINGDOM

ACERBIS U.K LTD  
UNIT 4 DUNFERMLINE COURT,  
KINGSTON, MILTON KEYNES  
MK10 0BY  
GREAT BRITAIN